



Prefabricated Roof Curbs

Models C, CR, CS, and CA













U.S. Fan manufactures a wide variety of prefabricated roof curbs to meet most applications. Curbs are available in standard sizes in addition to custom sizes.




Options

- Galvanized steel or aluminum
- Custom sizes and gauges
- Curb Hinge
- Burglar Bars
- Metal Liner
- Access Door
- 2" Insulation (Consult factory when using backdraft damper)

Curb Model	Application	Construction Features	Fast Ship Program	
			Next Day	10-Day
Model C, Type RF 	<ul style="list-style-type: none"> • Flat Roof • Insulated or non-insulated roof deck 	<ul style="list-style-type: none"> • Roofed-over type with built-in cant • 2" x 2" wood nailer • Damper shelf • 1 1/2" fiberglass insulation • Continuous welded seams • 8", 10", 12", 14", 16", 18", 20", 24" and 30" standard heights 	•	•
Model C, Type RF 	<ul style="list-style-type: none"> • Single Pitch Roof • Insulated or non-insulated roof deck 	<ul style="list-style-type: none"> • Roofed-over type with built-in cant • 2" x 2" wood nailer • Damper shelf • 1 1/2" fiberglass insulation • Continuous welded seams • 8", 10", 12", 14", 16", 18", 20", 24" and 30" standard heights • 1/12 thru 8/12, and 12/12 standard pitches 		•
Model C, Type RF 	<ul style="list-style-type: none"> • Flat Roof • Insulated roof deck 	<ul style="list-style-type: none"> • Roofed-over type with built-in cant • 2" x 2" wood nailer • Damper shelf • 1 1/2" fiberglass insulation • Continuous welded seams • 8", 10", 12", 14", 16", 18", 20", 24" and 30" standard heights • Raised cant; available in 1 1/2", 2", 2 1/2", 3" or 4" 		•
Model C, Type SF 	<ul style="list-style-type: none"> • Flat Roof • Insulated or non-insulated roof deck 	<ul style="list-style-type: none"> • Self-flashing type • 1/4" polystyrene gasket • Damper shelf • 1 1/2" fiberglass insulation • Continuous welded seams • 8", 10", 12", 14", 16", 18", 20", 24", and 30" standard heights 		•
Model C, Type SF 	<ul style="list-style-type: none"> • Single Pitch Roof • Insulated or non-insulated roof deck 	<ul style="list-style-type: none"> • Self-flashing type • 1/4" polystyrene gasket • Damper shelf • 1 1/2" fiberglass insulation • Continuous welded seams • 8", 10", 12", 14", 16", 18", 20", 24", and 30" standard heights • 1/12 thru 8/12, and 12/12 standard pitches 		•

Curb Model	Application	Construction Features	Fast Ship Program	
			Next Day	10-Day
Model CR, Type RF 	<ul style="list-style-type: none"> Flat Roof Insulated or non-insulated roof deck Kitchen/Restaurant 	<ul style="list-style-type: none"> Roofed over type with built-in cant 1/4" polystyrene gasket Vented or non-vented sides 18", 24", and 28" standard heights 	•	
Model CR, Type SF 	<ul style="list-style-type: none"> Flat Roof Insulated or non-insulated roof deck Kitchen/Restaurant 	<ul style="list-style-type: none"> Self-flashing type 1/4" polystyrene gasket Vented or non-vented sides 18", 24", and 28" standard heights 		•
Model CS, Type RF 	<ul style="list-style-type: none"> Flat Roof Insulated or non-insulated roof deck Sound Attenuating 	<ul style="list-style-type: none"> Roofed over type with built-in cant 16" standard height 2" x 2" wood nailer Continuous welded seams 1 1/2" fiberglass insulation Sound absorbing cells 		•
Model CS, Type SF 	<ul style="list-style-type: none"> Flat Roof Insulated or non-insulated roof deck Sound Attenuating 	<ul style="list-style-type: none"> Self-flashing type 16" standard height 1/4" polystyrene gasket Continuous welded seams 1 1/2" fiberglass insulation Sound absorbing cells 		•
Model CA 	<ul style="list-style-type: none"> Curb adapter Reducing or Enlarging 	<ul style="list-style-type: none"> 1/4" polystyrene gasket on top edge Continuous welded seams 		•

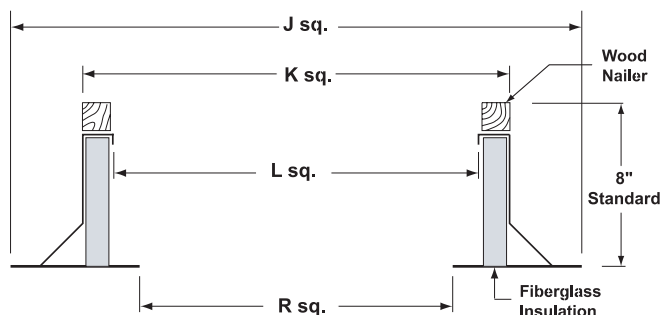

CURB DIMENSIONS				
MODEL	J	K	L	R
C12	20.00	12.00	9.00	6.00
C14.5	22.50	14.50	11.50	8.50
C17.5	25.50	17.50	14.50	11.50
C19.5	27.50	19.50	16.50	13.50
C22.5	30.50	22.50	19.50	16.50
C26.5	34.50	26.50	23.50	20.50
C32.5	40.50	32.50	29.50	26.50
C38.5	46.50	38.50	35.50	32.50
C44.5	52.50	44.50	41.50	38.50
C58.5	66.50	58.50	55.50	52.50

Dimensions are shown in inches.

